

# DroneSentry-X

## PORTABLE DETECT & DEFEAT

### Specifications

#### Detection Performance

Nominal UAS detection range: greater than 2km (1.2 miles)  
Detects drones operating on consumer and commercial ISM frequencies

#### Disruption Performance

Disrupts drones operating on consumer and commercial ISM frequencies  
Disruption range greater than 300m

#### Output Options

Audio, Visual alerts via Operator Control Module

#### Environment and Installation




External roof mounted pod designed to IP66  
Weight of sensor pod & brackets: 10kg  
Operating temperature: -40°C to +60°C (-40°F to +140°F)

#### Mounting

Clamps to standard roof racks  
Tamper proof mounting options available

#### Power

Input: 12VDC (optional 24VDC)  
Utilises auxiliary vehicle power supply

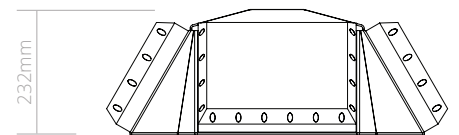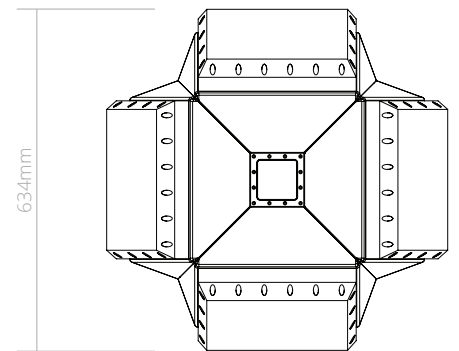

#### Colour Options:



White



Tan




Black



2RU module for in-vehicle mounting



DroneSentry-X Sensor Pod

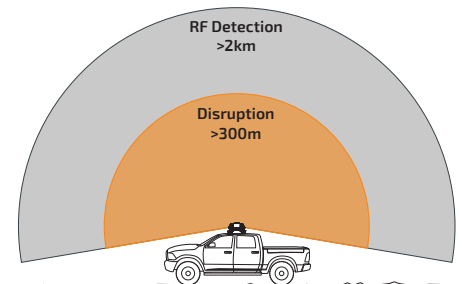

DroneSentry-X Detect and Disrupt Coverage